
28710 Mechanism Assembly Instruction

Step 1

Outer hexagon bolt 1/4''*38


Front driving square tube




Antislip nut 1/4''

Step 3

268 spring (covered with plastic), symmetric of both sides

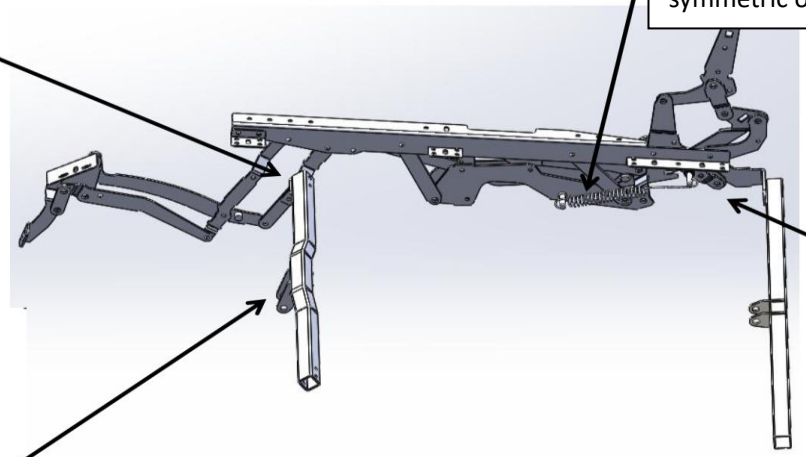


Step 2



Antislip nut 1/4''

Rear driving square tube

Outer hexagon bolt 1/4''*38

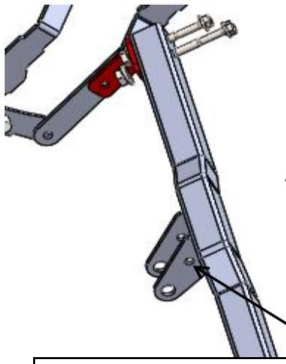

Note: mind the direction of the front driving tube when installing, with the identification hole facing the front

Points of attention

1. Make preparation before assembling according to Work Instruction of Mechanism Assembly
2. Please assemble according to the instruction, align the hole positions. The left and right parts are symmetrical.
3. Please control the power, for overexertion will make the screw loose; if the paint is removed on the end of the screw and mechanism, please make it up.
4. For the detail of the components, please check assembly list.

Made by:	check by:	approved by