
28722 Mechanism Assemble Instruction


Step 1

Hexagon bolt 1/4"*38

Front driving square tube

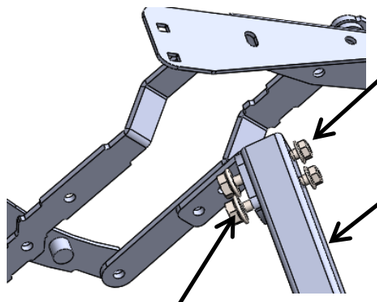

Antislip nut 1/4"

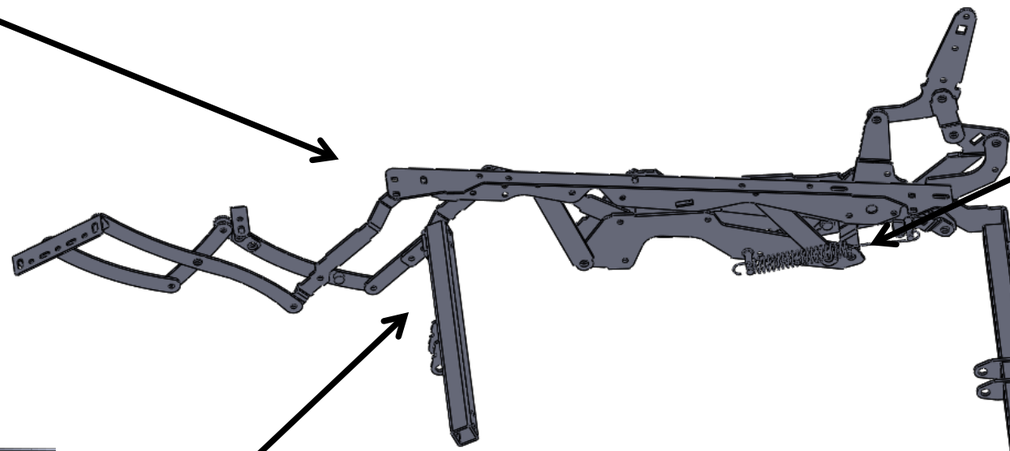


Step 3

268 Tension Spring

The left and right parts are symmetrical


Step 2

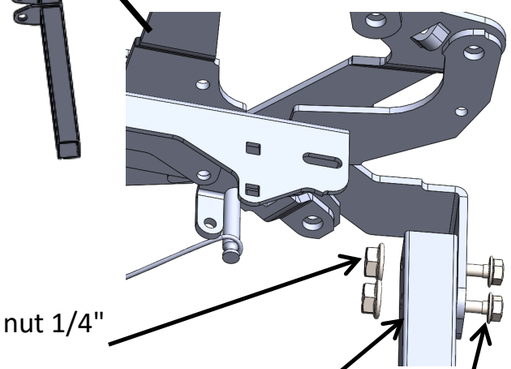

Antislip nut 1/4"

Hexagon bolt 1/4"*38

Rear driving square tube

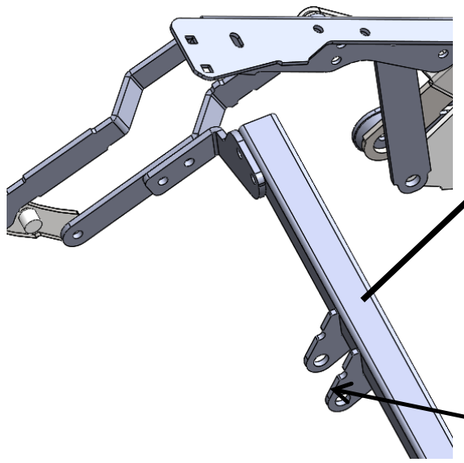

Attention: please mind the direction of the front driving square tube when assembling, identification hole facing the front.

Points for attention

1. Make preparation before assembling according to Work Instruction of Mechanism Assembly
2. Please assemble according to the instruction, align the hole positions in Step 1 and Step 2. Step 3 is to install the Spring. The left and right parts are symmetrical.
3. Please control the power, for overexertion will make the screw loose; if the paint is removed on the end of the screw and mechanism, please make it up.
4. For the detail of the components, please check 28722 assembly list.

Made by **Verified by** **Approved by**